

SPECIFICATION / TECHNICAL SHEET

Specifications




Nominal Voltage	12V
Rated capacity (20 hour rate)	95 Ah
Reserve Capacity	158min
Cold Cranking Amps @ -18°C	800
Dimensions	303mm (11.9inches)
	170mm (6.69inches)
	222mm (8.74inches)
Approx. Weight	22.1kg

Characteristics

Polarity	Right
Terminal Type	STD
Cell Layout	1
Hold Down	B1
Case	Black PP Material
Cover	Black PP Material
Handle	TS1
Technology	Flooded

General Features

- High capacity and high CCA
- Long life
- Advanced lead-calcium alloy technology, maintenance-free design
- Patented venting system bring less water loss and prevent acid leakage
- OE quality certification

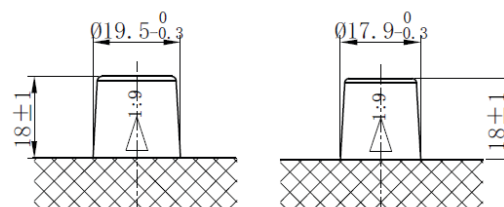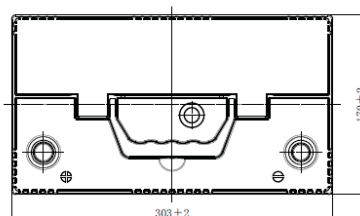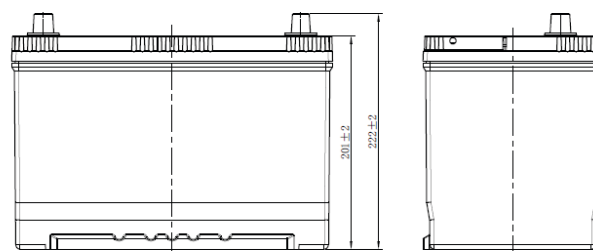

POS



NEG

*Values are subject to variation of +/- 5% in normal manufacturing processes.